



# SALINITY CELL

## CATALOGUE #: MC-35

---

### GENERAL DESCRIPTION:


The McNab MC-35 (MOD) salinity cell is an in-line water quality sensor used in conjunction water quality measurement and monitoring instruments. The TFE surfaces function to minimize galvanic voltages and action between the noble metal electrodes and non-noble metal valve and cell housing.

### APPLICATION:

The MC-35 (MOD) salinity cell is primarily used to monitor water quality in distiller evaporators and feed and condensate systems.

### SPECIFICATIONS:

Temperature:	Full temperature compensation to 250 degrees F.
Cable:	6 ft. cable supplied with each cell.
Installation:	Designed to fit with gate valves.
Weight (typ):	2 Lbs.
System:	25 volts max.
Test:	Cell test module

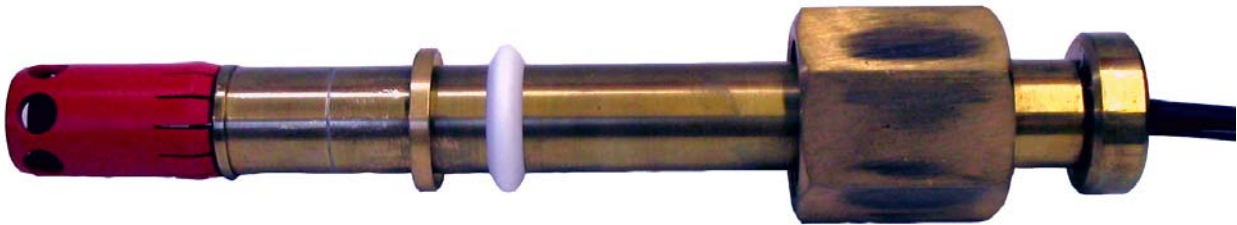

### NOTES:

- 1- Unless specified, parts to be considered as listed, "or equivalent."
- 2- Specifications subject to change without notice.

---

#### **McNAB, INCORPORATED**

20 North MacQuesten Parkway ♦ Mount Vernon, NY 10550 USA

Phone: 914-699-1616 ♦ Fax: 914-699-1671

Web: [www.themcnab.com](http://www.themcnab.com) ♦ E-mail: [info@themcnab.com](mailto:info@themcnab.com)